




FACKELMANN®



82552/3
82562/3




+ max. 20 kg

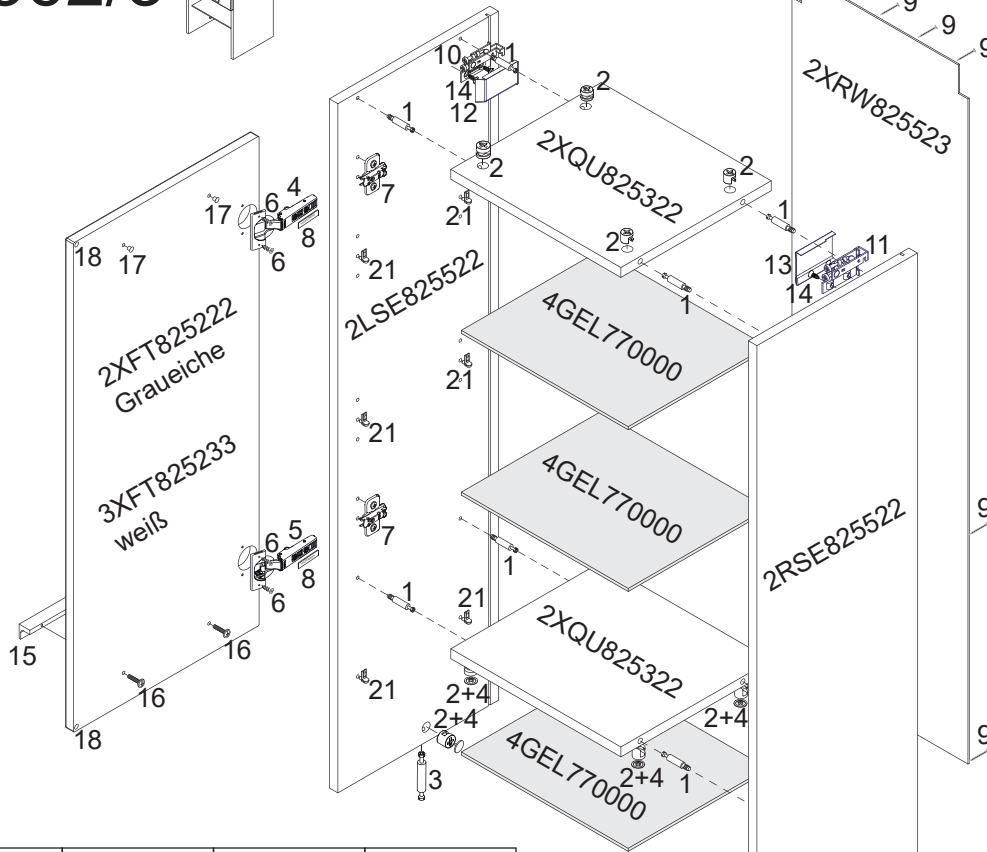




FACKELMANN® GmbH + Co. KG

Sebastian-Fackelmann-Str. 6
91217 Hersbruck • Deutschland
FAX: 09151/811-294
Servicetelefon: 09151/811-206
servicebm@fackelmann.de
www.fackelmann.com


1 	2 	3 	4
4BB1500001	4BB1515000	4BB1500040	4BB0070525
8 x	10 x	2 x	6 x




4 	5 	6 	7 	8 	9 	10 	11 	12
4BB1073500	4BB1073501	3,5x13mm 4SK3.5X130	4BB3710702	4BB3510703	4XBN1.2X20	4BB84LI050	4BB84RE050	4BB84LI051
1 x	1 x	4 x	2 x	2 x	15 x	1 x	1 x	1 x
13 	14 	15 	16 	17 	18 	19 	20 	21
4BB84RE051	4SK4.0X150 4 x 15mm	4BB8250160	4FKM4.0X20	4BB1245037	2BB268X1.6	4HS5.8X650	4BD8000000 Ø8	4SL2872810
1 x	4 x	1 x	2 x	2 x	2 x	2 x	2 x	12 x

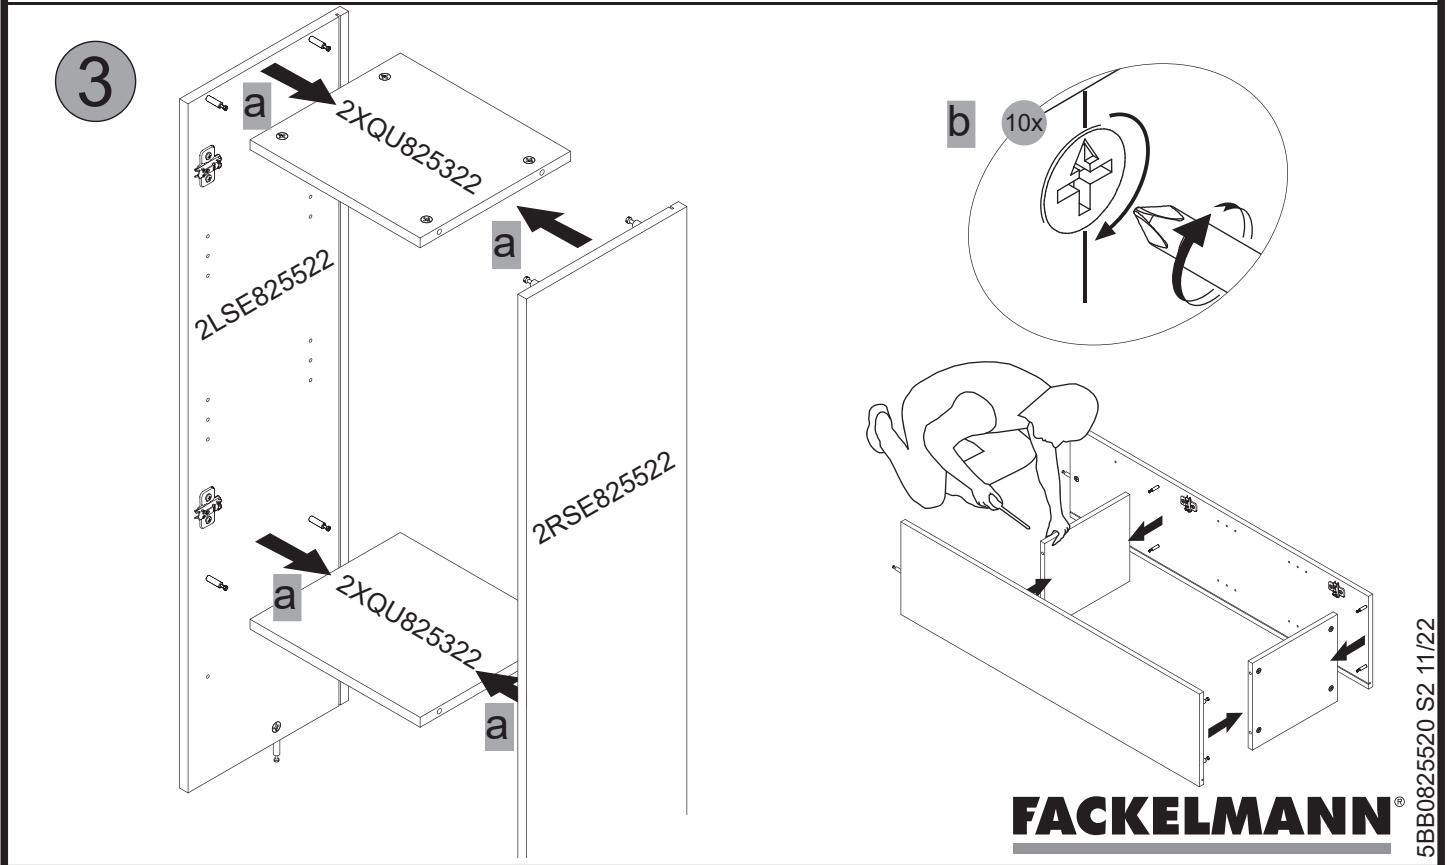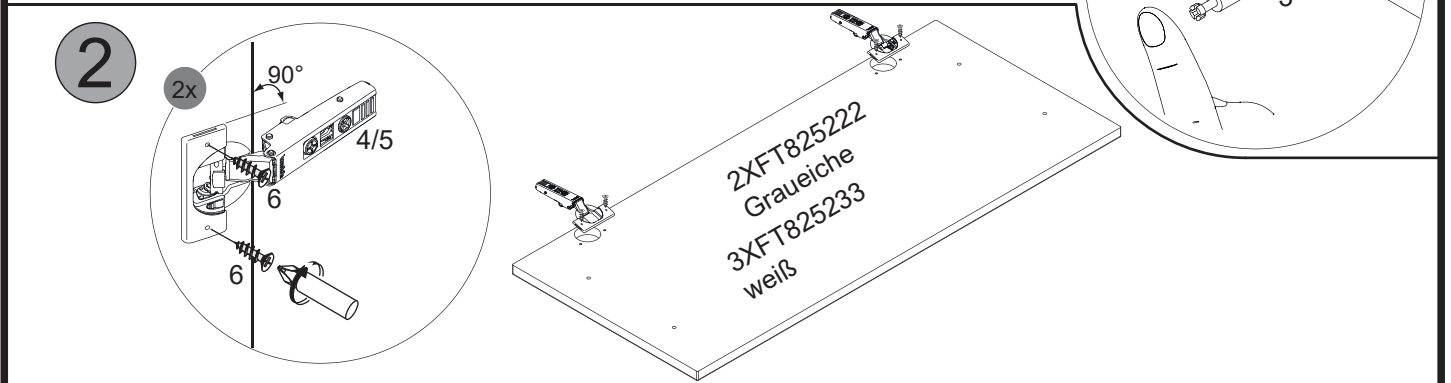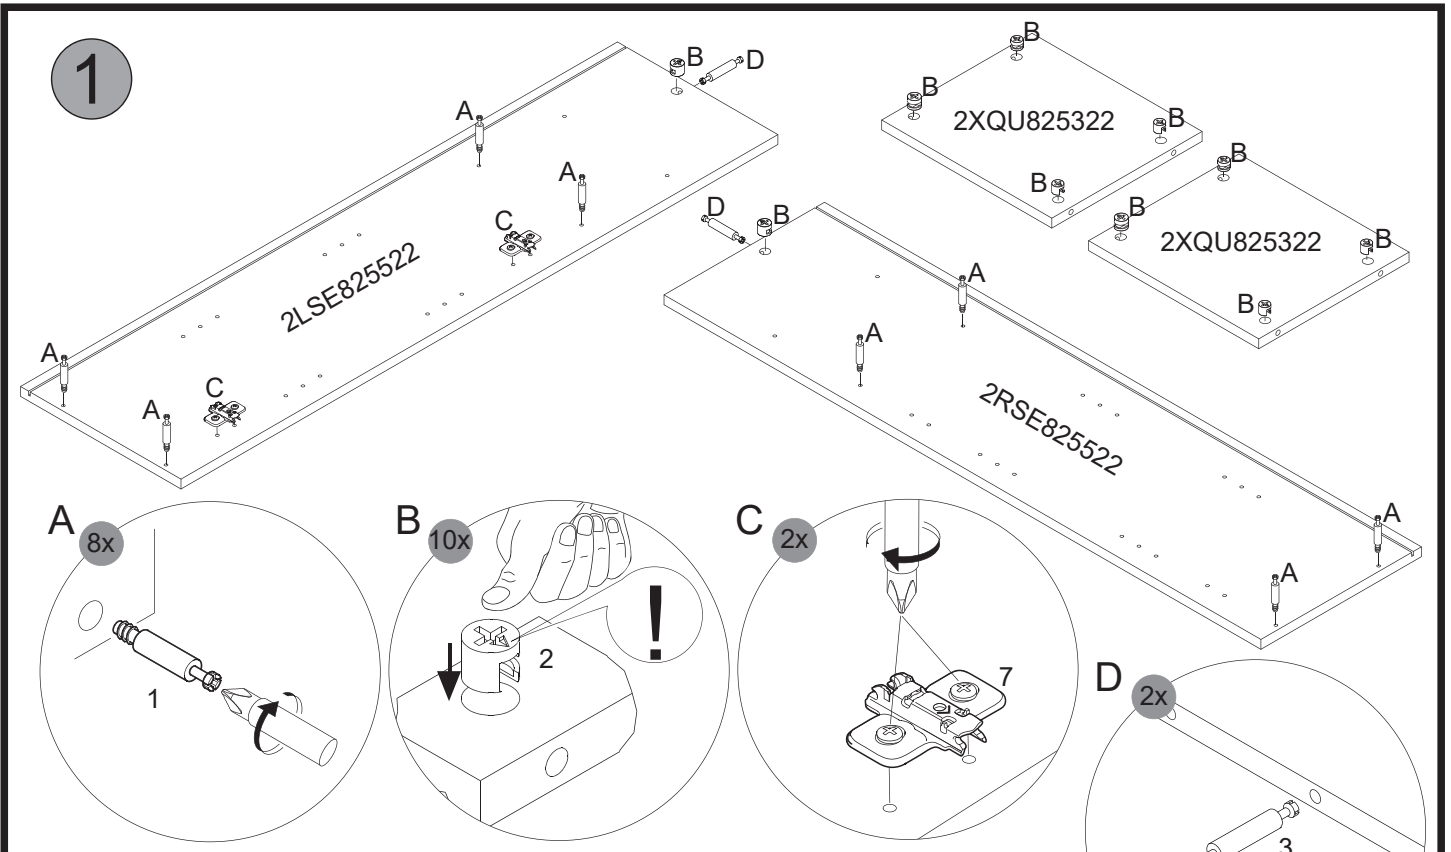



4

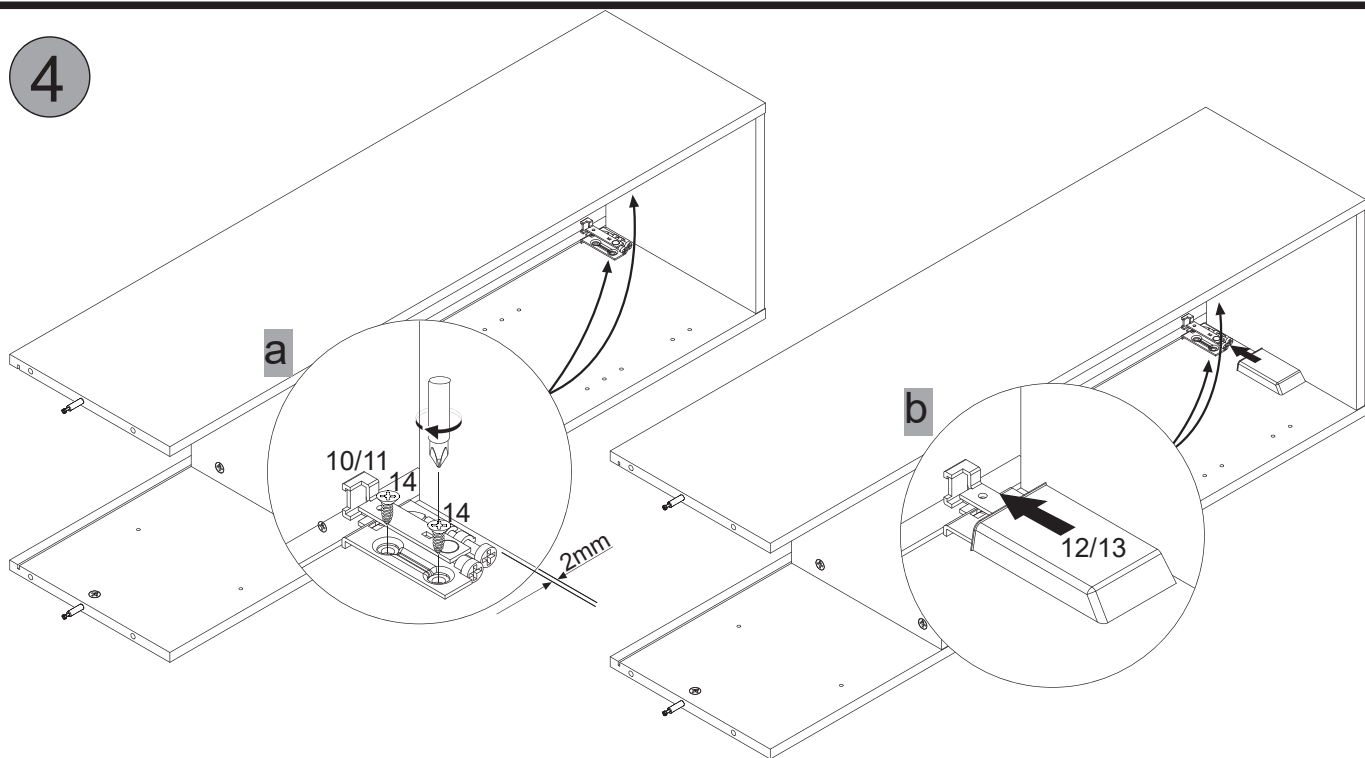


5

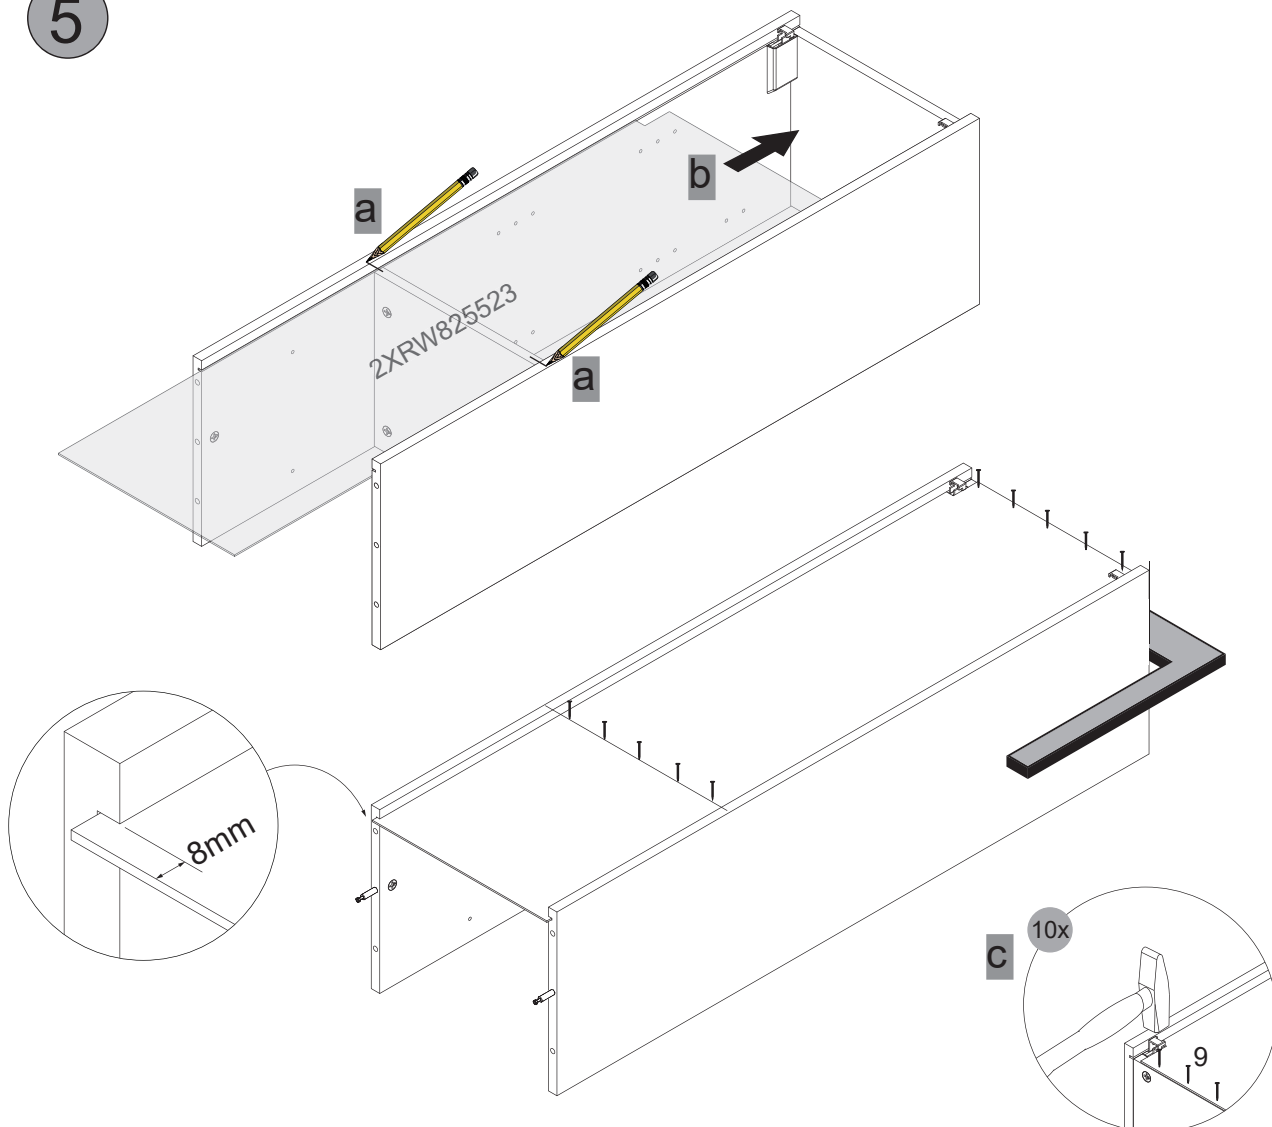






6 Achtung:
Vor dem Verbinden der beiden Korpusteile Schublade, Tür
und Glaseinlegeböden aus dem Unterschrank entfernen!

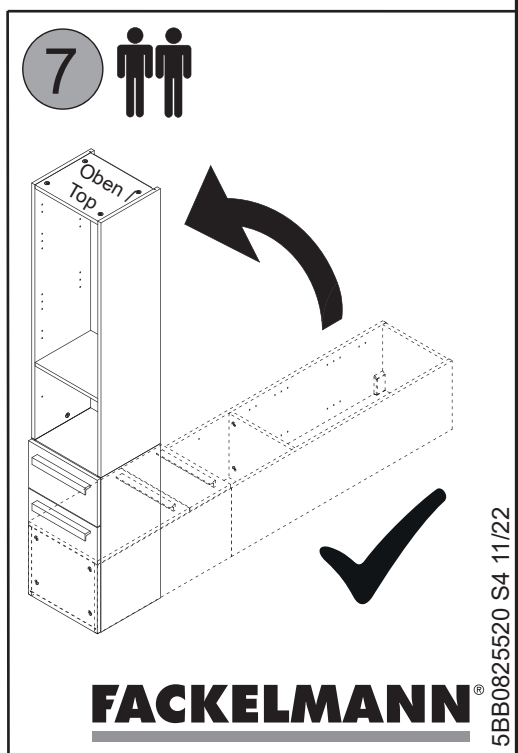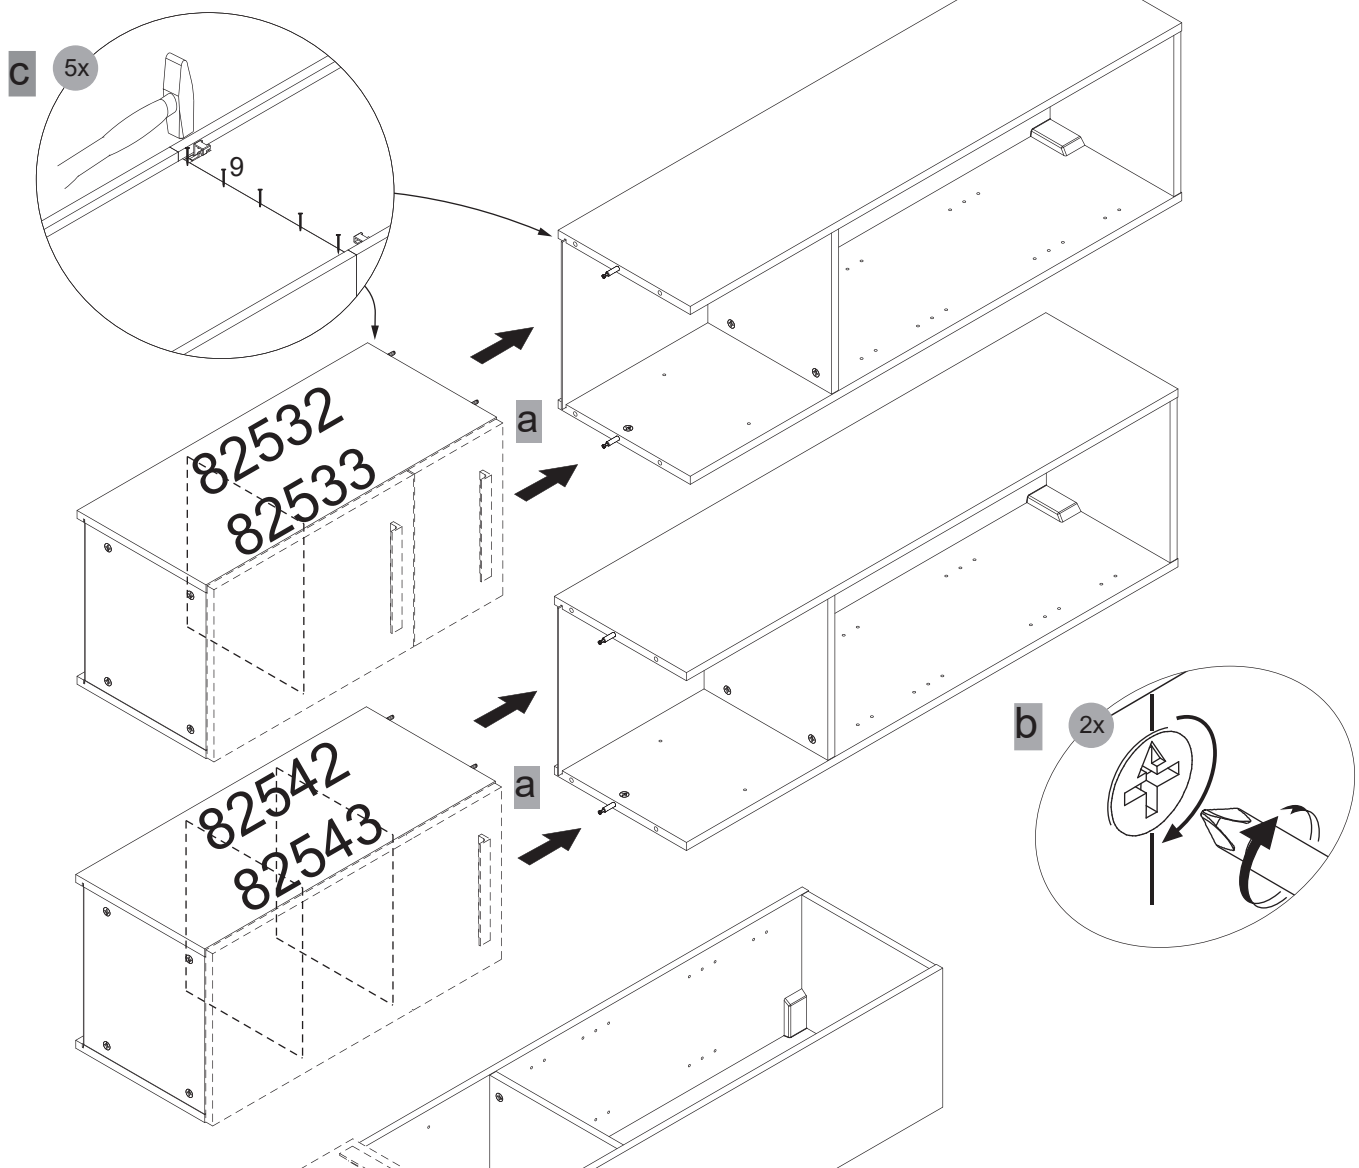

8

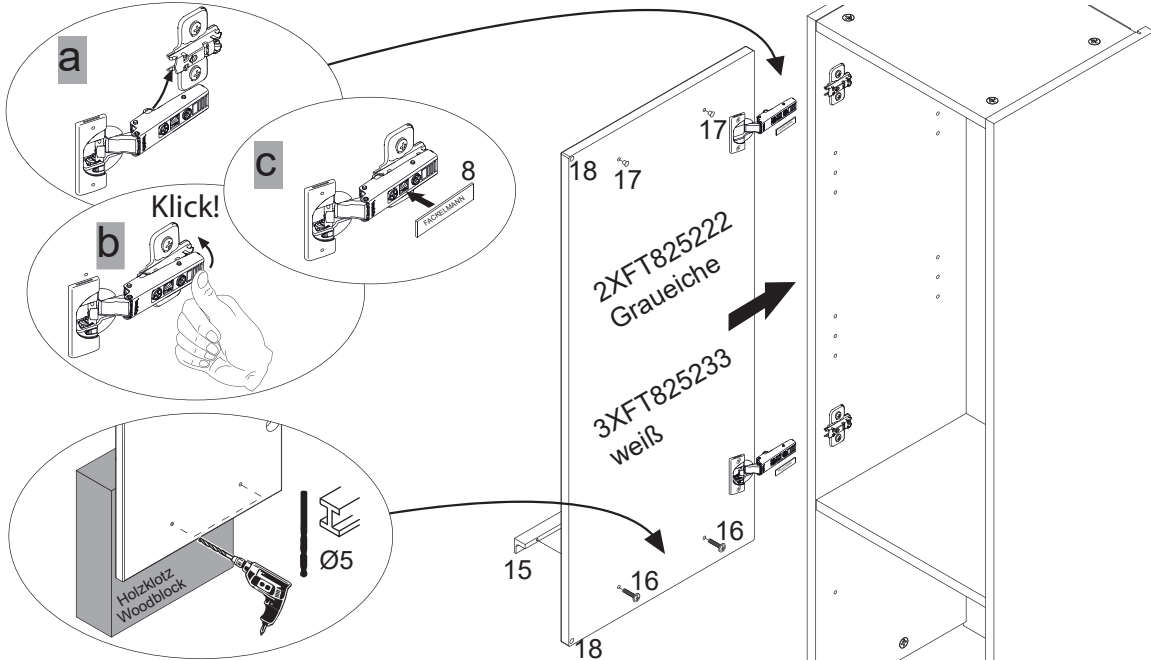

9

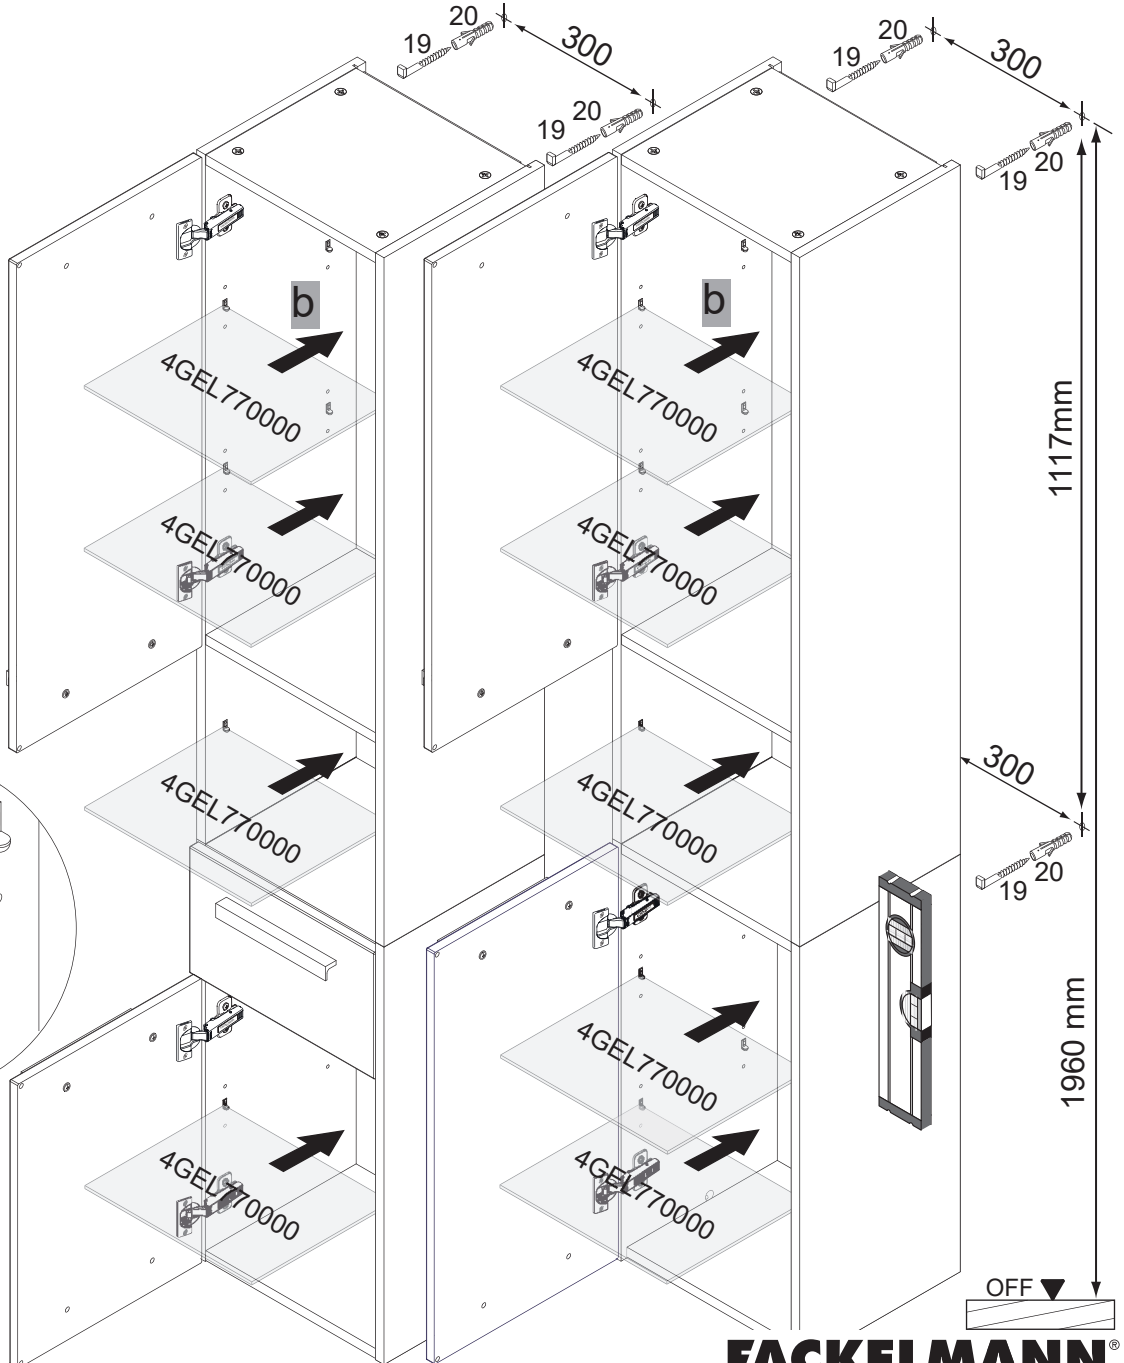



FACKELMANN

5BB0825520 S5 11/22


1




2

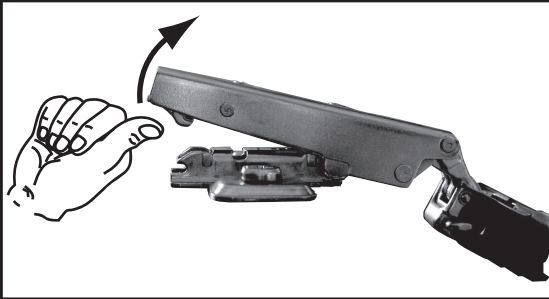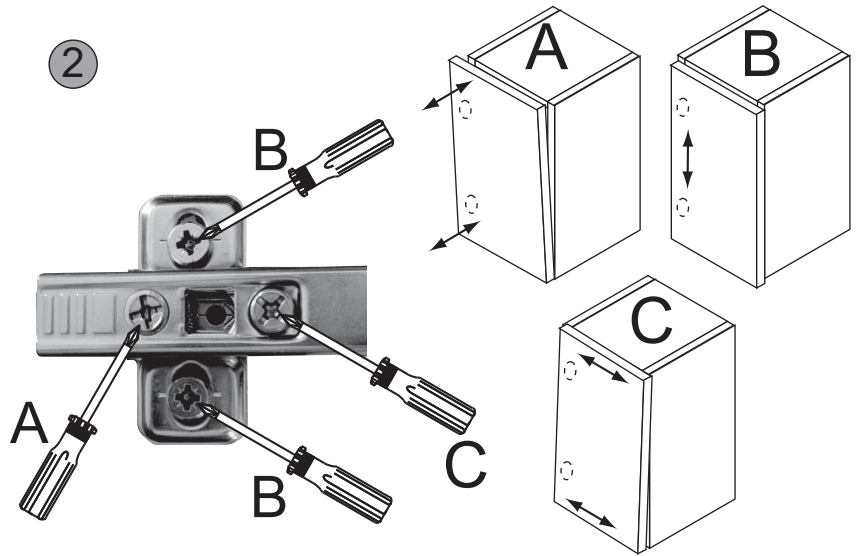


Dämpfung aktiv / attenuation on

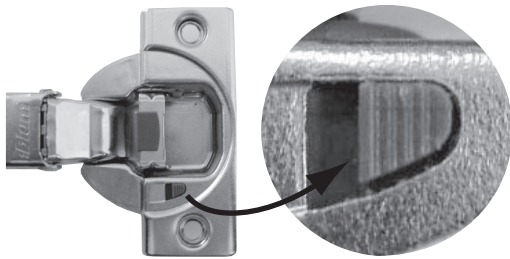


Dämpfung inaktiv / attenuation off

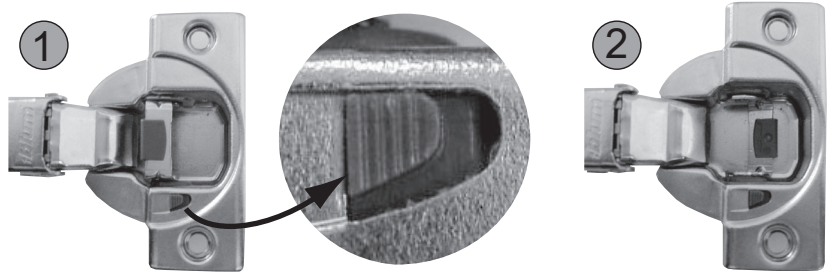

1



2

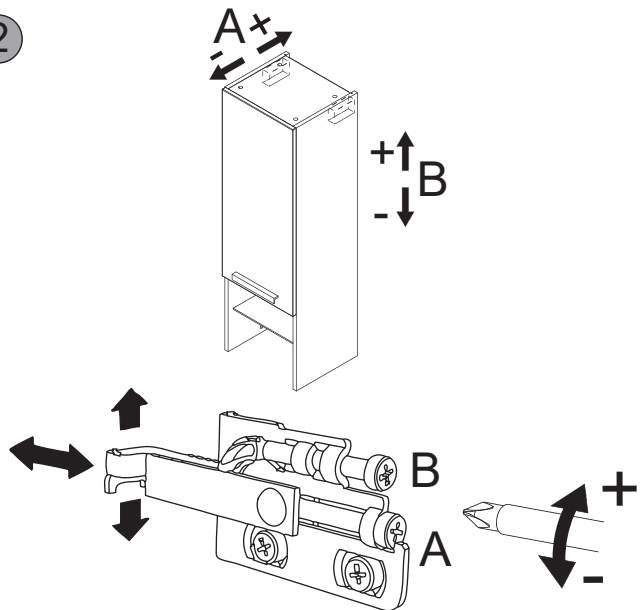

3

